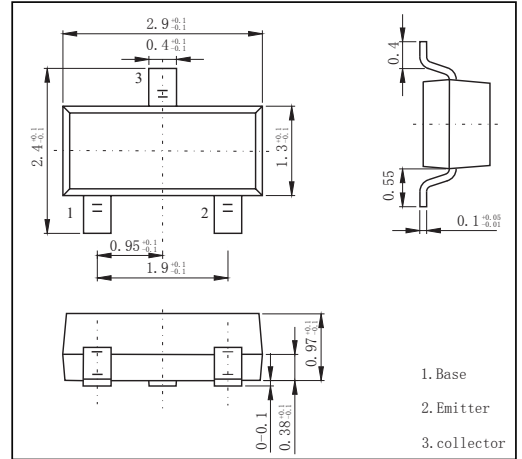


SOT-23 Plastic-Encapsulate Transistors
FEATURES

- High voltage and high current
- $V_{CEO} = -50V(\text{min.}), I_C = -150mA(\text{max.})$
- Low noise: $NF = 1dB(\text{Typ.})$ at $f = 1KHz$
- PNP TRANSISTORS
- Collector-Base Voltage: $V_{CBO} = -60V$

MECHANICAL DATA

- Case style: SOT-23 molded plastic
- Mounting position: any


MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	-50	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current -Continuous	I_C	-150	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	- 55 ± 150	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V_{CBO}	$I_C = -100 \mu A, I_E = 0$	-50			V
Collector-emitter breakdown voltage	V_{CEO}	$I_C = -0.1 mA, I_B = 0$	-50			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = -100 \mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -50V, I_E = 0$			-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -50V, I_B = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -6V, I_C = -2mA$	130		400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100 mA, I_B = -10mA$			-0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -100 mA, I_B = -10mA$			-1.1	V
Transition frequency	f_T	$V_{CE} = -10V, I_C = -1mA, f = 30MHz$	80			MHz