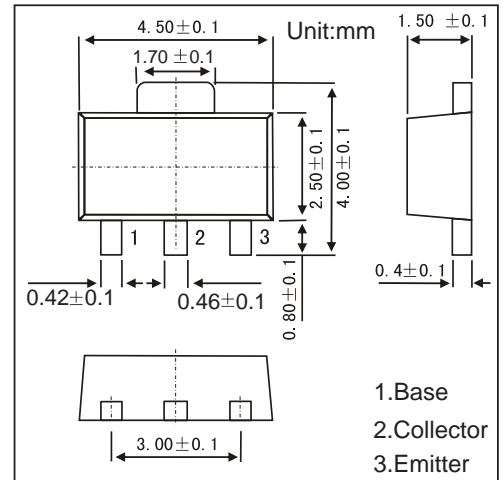


SOT-89 Plastic-Encapsulate Transistors
FEATURES

- Collector Current Capability $I_C=2A$
- Collector Emitter Voltage $V_{CE0}=32V$
- High-speed switching
- Complements to 2SB1188
- NPN Transistors

MECHANICAL DATA

- Case style:SOT-89molded plastic
- Mounting position:any


MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CBO}	40	V
Collector - Emitter Voltage	V_{CEO}	32	
Emitter - Base Voltage	V_{EBO}	5	
Collector Current - Continuous	I_C	2	A
Collector Power Dissipation	P_C	0.5	W
Junction Temperature	T_J	150	°C
Storage Temperature range	T_{stg}	-55 to +150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CBO}	$I_C=100\mu A, I_E=0$	40			V
Collector- emitter breakdown voltage	V_{CEO}	$I_C=1mA, I_B=0$	32			
Emitter - base breakdown voltage	V_{EBO}	$I_E=100\mu A, I_C=0$	5			
Collector-base cut-off current	I_{CBO}	$V_{CB}=20V, I_E=0$			1	uA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$			1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=2A, I_B=200mA$			0.8	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C=2A, I_B=200mA$			1.2	
DC current gain	h_{FE}	$V_{CE}=3V, I_C=500mA$	82		390	
Collector output capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$		30		pF
Transition frequency	f_T	$V_{CE}=5V, I_E=50mA, f=100MHz$		100		MHz

RATINGS AND CHARACTERISTIC CURVES

